


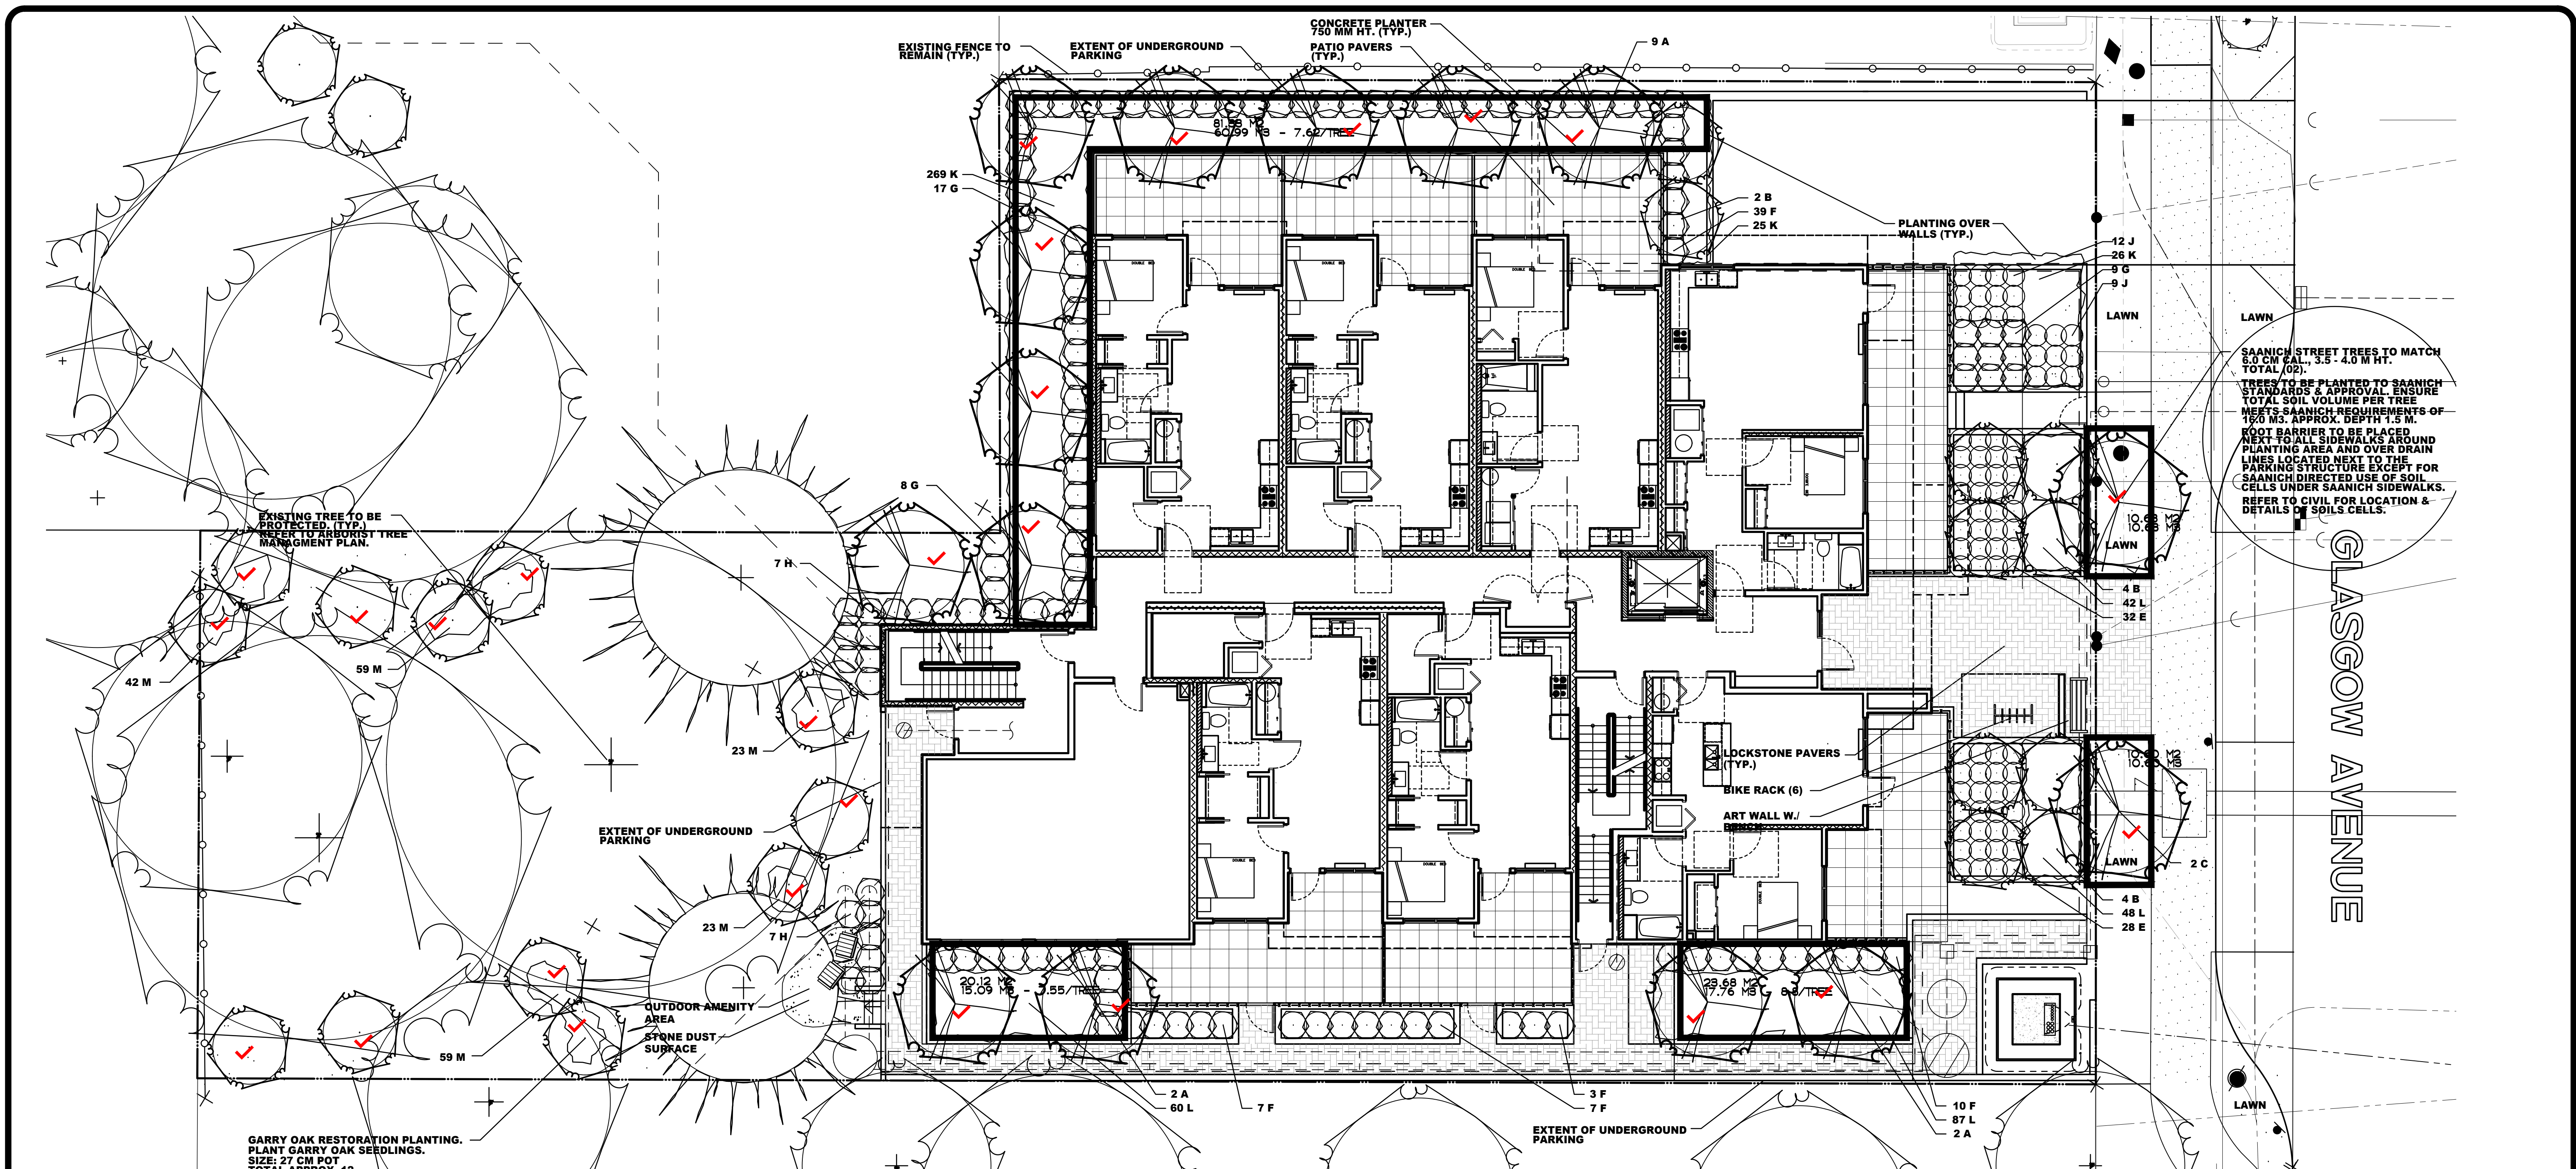

GARRY OAK RESTORATION PLANTING.
PLANT GARRY OAK SEEDLINGS.
SIZE: 27 CM POT
TOTAL APPROX. 12.
12 D

SOIL VOLUMES

BOULEVARD TREES - 21.23 M3 AVAILABLE. MEETS SAANICH 16.0 M3 REQUIREMENT PER TREE.
W/ SOIL CELLS
PLANTER TREES - 114.48 M3 AVAILABLE. MEETS CLS RECOMMENDED DEPTH OF 750 MM PER TREE.

RECEIVED
MARCH 30 2026
PLANNING DEPT.
DISTRICT OF SAANICH

PLANT LIST

KEY	QTY	BOTANICAL NAME	COMMON NAME	SIZE	ROOTS	COMMENTS
A	13	ACER CIRCINATUM	VINE MAPLE	2.5 - 3.0 M HT.	B & B	MULTI-STEM, MIN. 3 STEMS, FULL
B	10	RIBES SANGUINEUM 'KING EDWARD'	RED FLOWERING CURRANT	1.2 - 1.5 M HT	B & B	MULTI-STEM, FULL
C	2	QUERCUS GARRYANA	GARRY OAK	6.0 CM CAL. 3.0-3.5 M HT.	B & B	1.8 M. STANDARD, FULL
D	12	QUERCUS GARRYANA	GARRY OAK	1.0 M HT.	27 CM POT	FULL
E	60	LIRIOPE MUSCARI 'BIG BLUE'	BIG BLUE LILY TURF	40 CM SPR.	21 CM POT	FULL, PLANT 40 CM O.C.
F	66	MAHONIA AQUIFOLIUM	OREGON GRAPE	60 CM HT.	27 CM POT	FULL
G	42	PHYSOCARPUS OPULIFOLIUS 'LUTEUS'	GOLDEN NINEBARK	60 CM HT.	27 CM POT	FULL
H	14	POLYSTICHUM MUNITUM	SWORDFERN	60 CM SPR.	27 CM POT	FULL
J	21	POTENTILLA FRUTICOSA 'ABBOTSWOOD'	ABBOTSWOOD POTENTILLA	40 CM HT.	21 CM POT	FULL
K	410	ARCTOSTAPHYLOS UVA URSI	KINNIKINNICK	30 CM SPR.	15 CM POT	MIN. 3 LEADERS, PLANT 45 CM O.C.
L	237	GAULTHERIA PROCUMBENS	WINTER GREEN	30 CM SPR.	15 CM POT	FULL, PLANT 30 CM O.C.
M	206	CAMASSIA CUSICKII	CAMAS LILY	20 CM HT.	15 CM POT	FULL, PLANT 40 CM O.C.

NOTE: PLANTS MUST MEET SIZE AND POT SPECIFICATION AND MAY EXCEED CANADIAN LANDSCAPE STANDARDS.
AREA OF PLANT MATERIAL SOURCING TO INCLUDE WESTERN NORTH AMERICA.

NOTES

- CONTRACTOR TO REPORT ALL ERRORS, OMISSIONS AND DISCREPANCIES TO LANDSCAPE ARCHITECT IMMEDIATELY AND PRIOR TO COMMENCEMENT OF WORK.
- CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE LOCATION OF ALL UNDERGROUND SERVICES AND ANY DAMAGE TO SAME CAUSED BY HIS WORK.
- CONTRACTOR TO ENSURE SMOOTH CONTINUOUS POSITIVE DRAINAGE AWAY FROM BUILDING TO ALL DRAINAGE PICKUP POINTS.
- ALL LANDSCAPED AREAS TO BE IRRIGATED WITH A FULLY AUTOMATIC UNDERGROUND IRRIGATION SYSTEM. COORDINATE IRRIGATION SLEEVES, TIMER CLOCK LOCATION AND WATER CONNECTIONS WITH GENERAL CONTRACTOR.
- WHERE PLANTING BEDS ADJUT LAWN AREA INSTALL MAINTENANCE STRIP - 2 X 4 PRESSURE TREATED FIR EDGER, STAKED WITH 2 X 4 X 45CM. PRESSURE TREATED FIR STAKES. STAKE 1.2 M. O.C. AND AT ALL JOINTS AND ENDS. TOP OF STAKE TO BE 2.5CM. BELOW TOP OF EDGER.
- ALL LAWN AREAS TO BE SODDED.
- COMPOST TO BE PLACED TO 75 MM DEPTH AFTER SETTLEMENT IN ALL PLANTING BEDS.
- ALL LANDSCAPE WORK ON CITY PROPERTY TO SAANICH STANDARD AND APPROVAL.
- STREET TREES TO BE IRRIGATED WITH 2 DRIP LOOPS FROM PROJECT SYSTEM ON A SEPARATE ZONE.
- REFER TO ARCHITECTURAL/CIVIL FOR HARD LANDSCAPE & SITE GRADING.

10. 03/09/26 J.P. GENERAL SITE
9. 03/18/25 J.P. ARBORIST COMMENTS
8. 02/27/25 J.P. ARBORIST COMMENTS
7. 02/26/25 J.P. ARBORIST COMMENTS


SUBMITTED FOR BUILDING PERMIT SEPTEMBER 20, 2024
SUBMITTED FOR DEVELOPMENT PERMIT APRIL 12, 2022

NO.	DATE	BY	REVISION
1.	12/21/22	S.P.	GENERAL
2.	08/18/23	S.P.	ARBORIST COMMENTS
3.	09/20/23	J.P.	BOULEVARD
4.	10/27/23	J.P.	ART/BENCH/AMENITY
5.	11/29/24	J.P.	ARBORIST COMMENTS
6.	01/29/25	J.P.	SOILS ANALYSIS
BY: S.P.			
CHECKED: J.P.			
DATE: APRIL 12, 2022			
DRAWING: HG-L1R2R5.3			
FILE: 246 21 06			

Lombard North Group
Lombard North Group (BC) INC.
839 COMBURN STREET
VICTORIA, BRITISH COLUMBIA, V8W 1R1
TELEPHONE: (250) 386-3338
EMAIL: lombardnorthgroup@gmail.com

JOB NAME

3351 GLASGOW AVENUE
VICTORIA, B.C.

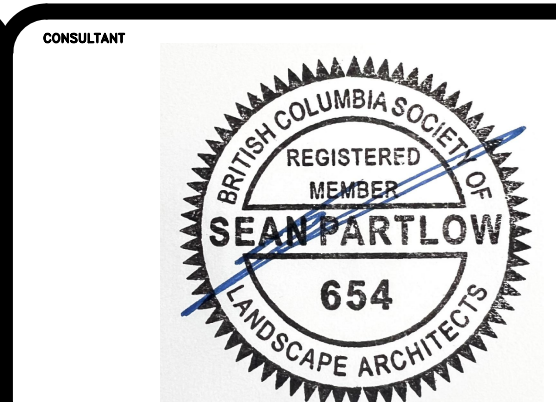

LANDSCAPE PLAN
L1